

Pressure Reducing Valve

IR-420-KXZ

The BERMAD Pressure Reducing Valve is a hydraulically operated, diaphragm actuated control valve that reduces higher upstream pressure to lower constant downstream pressure regardless of fluctuating demand, and opens fully upon line pressure drop.



Features and Benefits

- Hydraulic Pressure Control
 - Line pressure driven
 - Protects downstream systems
 - Opens fully upon line pressure drop
- Advanced Globe Hydro-Efficient Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low actuation pressure
 - Excellent low flow regulation performance
 - Progressively restrains valve closing
 - Prevents diaphragm distortion
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service
 - Easy addition of control features




Typical Applications

- Pressure Reducing Stations
- Systems Subject to Varying Supply Pressure

- [1] BERMAD Model IR-420-KXZ establishes reduced pressure zone protecting laterals and distribution line.
- [2] BERMAD Automatic Metering Valve Model IR-900-D0
- [3] BERMAD Vacuum Breaker Model 1/2"-ARV

BERMAD Irrigation



IR-420-KXZ


For full technical details, refer to Engineering Section.

400 Series
Pressure Reducing
Standard

Technical Specifications

Dimensions and Weights

Pattern	Globe						Angle					
	Connections	Threaded					Fl.	Threaded				Fl.
		40 1½"	50 2"	65 2½"	80R 3"R	80 3"	100 4"	50 2"	65 2½"	80R 3"R	80 3"	100 4"
Lg	mm inch	153 6	180 7.1	210 8.3	210 8.3	255 10.0	320 12.6	N.A.	N.A.	N.A.	N.A.	N.A.
La	mm inch	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	86 3.4	110 4.3	110 4.3	110 4.3	160 6.3
H	mm inch	87 3.4	114 4.5	132 5.2	140 5.5	165 6.5	242 9.5	136 5.4	180 7.1	178 7	184 7.2	223 8.8
C	mm inch	52 2	68 2.7	80 3.1	84 3.3	100 3.9	145 5.7	82 3.2	108 4.2	107 4.2	110 4.3	134 5.3
h	mm inch	29 1.1	39 1.5	45 1.8	53 2.1	55 2.2	112 4.4	61 2.4	93 3.7	91 3.6	80 3.1	112 4.4
A; B	mm inch	130 5	130 5	130 5	140 6	175 7	312 12.3	130 5.1	130 5.1	140 5.5	175 6.9	312 12.3
Weight	Kg lb.	2 4.4	4 8.8	5.7 12.6	5.8 12.8	13 28.7	28 61.7	4.4 9.7	5.8 12.8	7 15.4	11 24.3	26 57.3

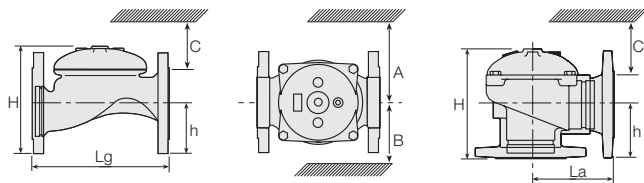

Technical Data

End connections:

Size		1½"	2"	2½"	3"R	3"	4"
		DN40	DN50	DN65	DN80R	DN80	DN100
Threaded	Globe	■	■	■	■	■	■
	Angle		■	■		■	
Flanged	Globe				■	■	■
	Angle				■	■	■
Grooved	Globe					■	■
	Angle					■	■

Pressure Rating: 10 bar; 145 psi


Operating Pressure Range: 0.5-10 bar; 7-145 psi

For lower pressure requirements, consult factory


Setting Range: 1-7 bar; 15-100 psi

Setting ranges vary according to specific pilot spring. Please consult factory.

Flow Chart

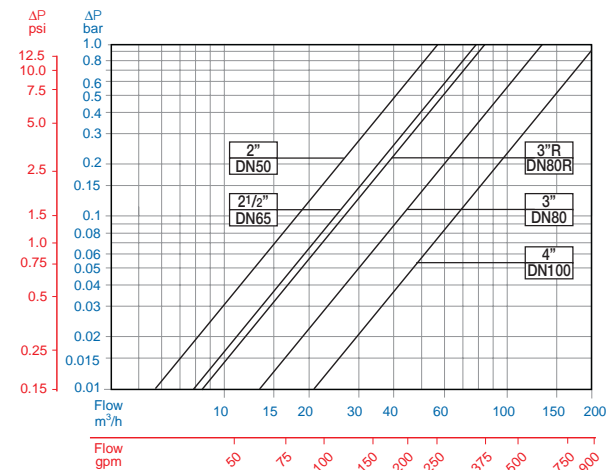

Operation

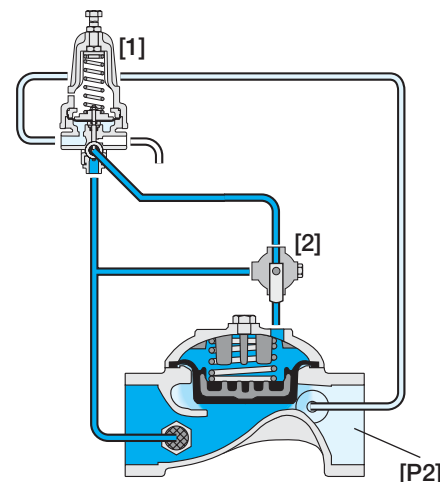

The Pressure Reducing Pilot [1] commands the main Valve to throttle closed should Downstream Pressure [P2] rise above pilot setting and to open fully when it drops below pilot setting. The Manual Selector [2] enables local manual closing.

How to Order

Please specify the requested valve in the following sequence: (for more options, refer to Ordering Guide.)

Sector	Size	Primary Feature	Additional Feature	Additional Feature	Pattern	Construction Materials	End Connections	Coating	Voltage -Main Valve Position	Tubing & Fittings	Additional Attributes
IR	1½-4"	420	00	-	G	I	BP	PG	-	PP	KXZ
	Other sizes available on request.										
Globe		G	BSP		BP	Plastic Tubing & Fittings		PP		Plastic Control Accessories	K
Angle		A	NPT		NP	Plastic Tubing & Brass Fittings		PB		3-Way Control	X
			ISO-16		16					Manual Selector	Z
			ISO-10		10					Valve Position Indicator ⁽¹⁾	I
			IS 14 (ISO 10/4 Holes)		14					Flow Stem ⁽¹⁾	M
			ANSI-125		A1						
			JIS-10		J1						
			BST-D		BD						
			Grooved		VI						

For available end connections/sizes, see End Connections Table above.

(1) Standard Irrigation Cover & Diaphragm are unfitted to Attributes I, M. Other additional attributes are optional. Please consult full-stop



info@bermad.com • www.bermad.com

The information herein is subject to change without notice. BERMAD shall not be held liable for any errors. All rights reserved. © Copyright by BERMAD. PC4AE20-KXZ 05