


# Retention Tanks

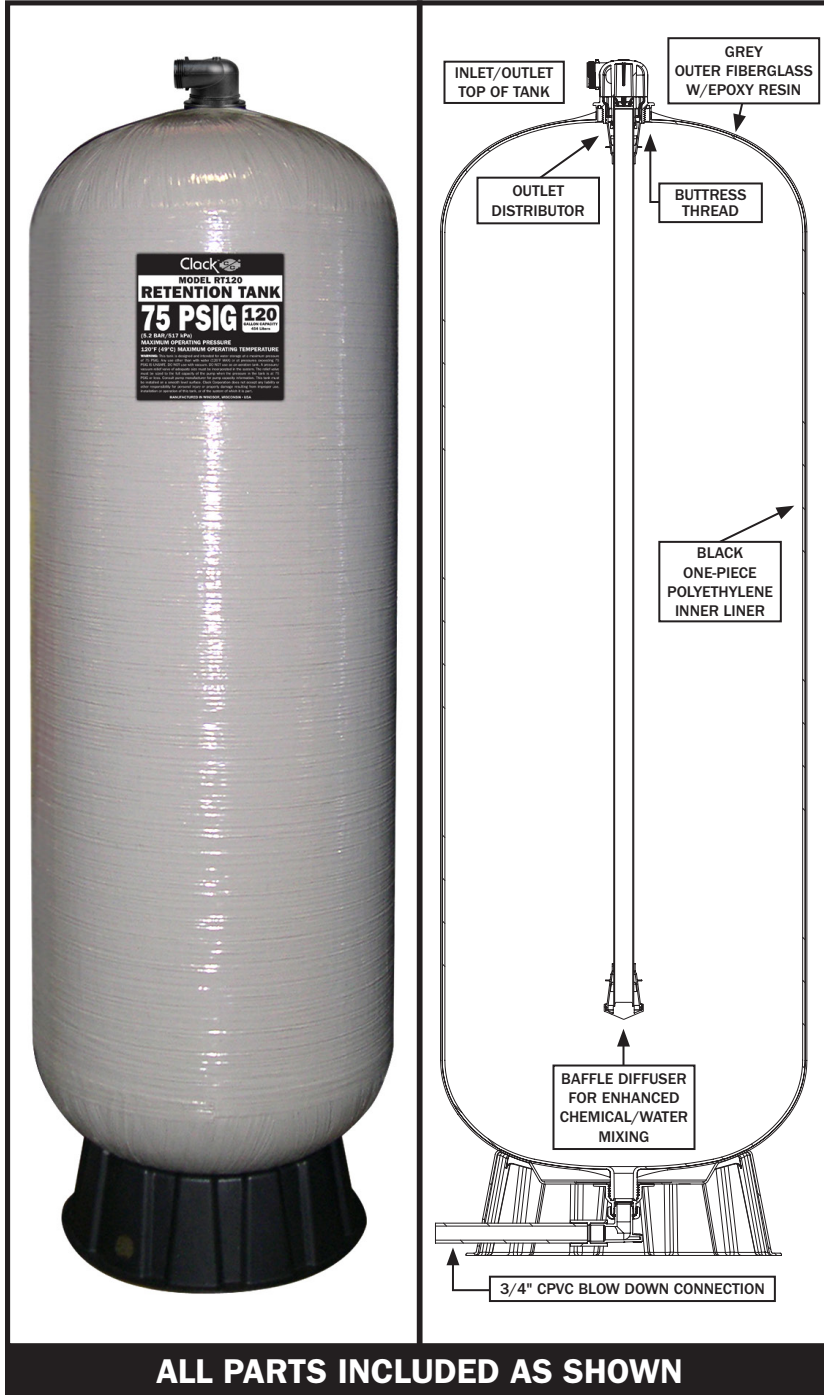

**ALL PARTS INCLUDED AS SHOWN**

## FEATURES:

- Convenient Inlet/Outlet piping connection at the top of the tank
- Inlet/Outlet Adapter easily accommodates the use of a vacuum breaker
- Inlet/Outlet Buttress thread for strength
- Bypass valve option available
- Full 3/4" blow down drain at lowest point of tank
- 360° degree drain orientation
- Black one piece polyethylene liner for impact and corrosion resistance
- 5 year limited warranty

## SPECIFICATIONS:

- Maximum Operating Pressure 75 psi/517 kPa
- Maximum Operating Temperature 120°F 49°C
- Maximum Allowable Operating Vacuum 0
- A Vacuum/Pressure Relief Valve of adequate size must be incorporated in the plumbing

## FITTINGS INCLUDED:

- 1 1/4" x 1 1/2" PVC Straight Solvent Fitting Kit and
- 1 1/4" Plastic Straight Male NPT Fittings




V3007-07

V3317

## OPTIONAL:

Bypass




V3006

ORDER NO.	DESCRIPTION	TANK ASSEMBLY DIAMETER INCHES/MM	TANK ASSEMBLY HEIGHT INCHES/MM	CAPACITY GALLONS/LITERS	QTY/CARTON	SHIPPING WEIGHT LBS/KG
C2250	RT40 Retention Tank	21/533	40.5/1,029	40/151	1	37/17
C2251	RT80 Retention Tank	21/533	67.5/1,715	80/303	1	66/30
C2252	RT120 Retention Tank	24/607	78.5/1,994	120/454	1	80/36


ORDER NO.	DESCRIPTION	QTY/CARTON	SHIPPING WEIGHT LBS/KG
V3006	Bypass	24	26/12

# Retention Tanks

## Dimensions

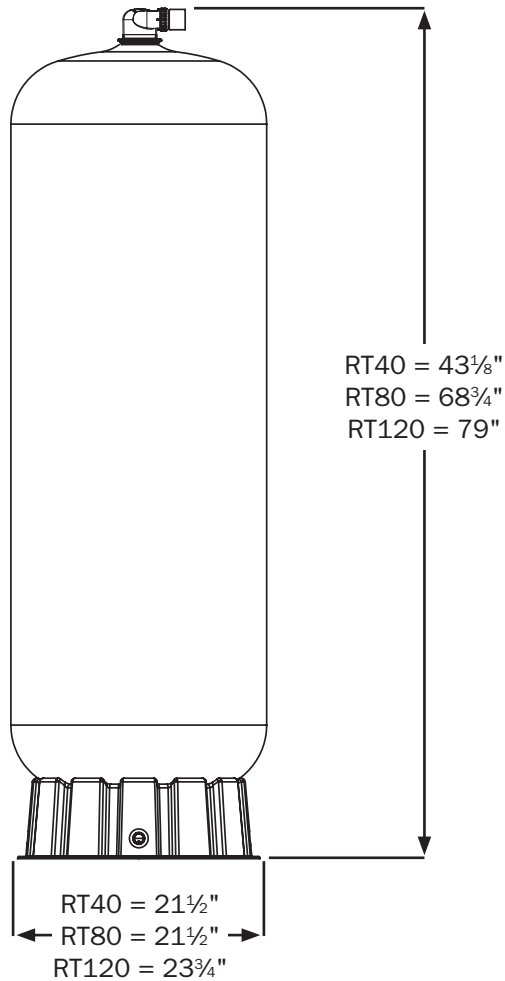

## View of Assembly

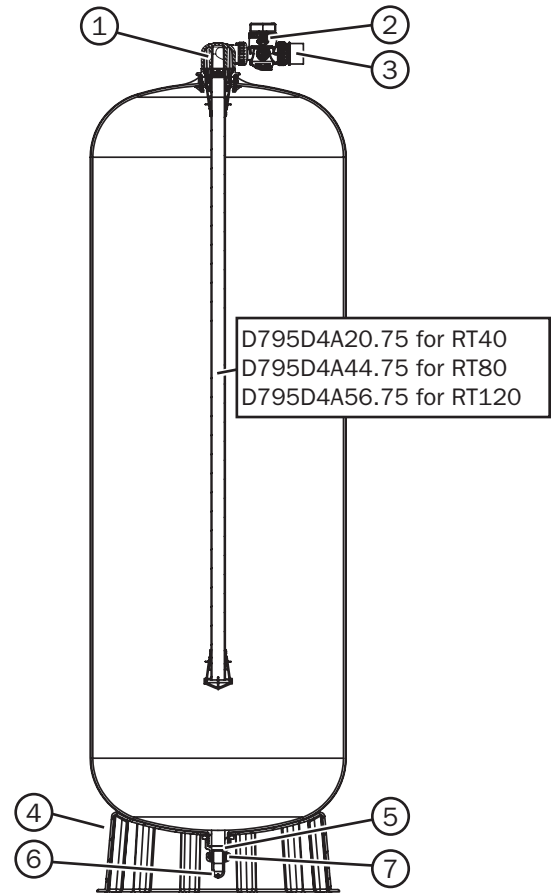

1	D1400RT · 1191RT In/Out Head
2	V3006 · WS1 Bypass Valve (optional)
3	V3007-07 · WS1 1 $\frac{1}{4}$ " x 1 $\frac{1}{2}$ " Solvent Kit V3317 · WS1 1 $\frac{1}{4}$ " Plastic Male NPT
4	C2256 · RT Tank Base
5	D1291 · RT Tank Drain Adapter V3417 · O-ring for Drain Adapter
6	V3790 · WS1 Elbow $\frac{3}{4}$ " Quick Connect D1142-10 · $\frac{3}{4}$ " x 10" CPVC Pipe
7	V3151 · WS1 Nut 1" Quick Connect V3150 · WS1 Split Ring V3105 · WS1 O-ring



This product is Tested and Certified by NSF International against NSF/ANSI/CAN Standard 61 for material requirements and NSF/ANSI 372.