




- Self priming to 9m at sea level
- Designed specifically for rainwater tanks, shallow well, spear and boreholes to a maximum depth of 9 metres
- Ideal for drip irrigation and garden watering
- Designed for domestic and urban household pressure systems
- 2m Plug n Play Cable



<b>Liquid:</b>	<b>Electrical data:</b>
Liquid Type: Clean Water Clean water temperature range: 20-35°C	Rated voltage: 240V Mains frequency: 50 Hz Current: 3.12 amps Capacitor: 12.5 uF Motor duty: Continuous Motor type: Asynchronous TEFC Motor protection: In-built thermal overload
<b>Materials:</b>	Ingress protection: IP 44 Insulation class: F Power cable length: 2 m Net weight: 8.2 kg Dimensions: 406L x 174W x 197H (mm)
Pump body: Stainless Steel Diffuser, Impeller: Technopolymer Mechanical seal: Carbon/ Ceramic Wear rings: Stainless Steel	<b>Hydraulic Data:</b>
<b>Installation:</b>	Flows to: 45 L/m Heads to: 42 m
Maximum ambient temperature: 40 °C Maximum operating pressure: 8 bar Pipe connections discharge: 1" BSPF / 1" BSPM	

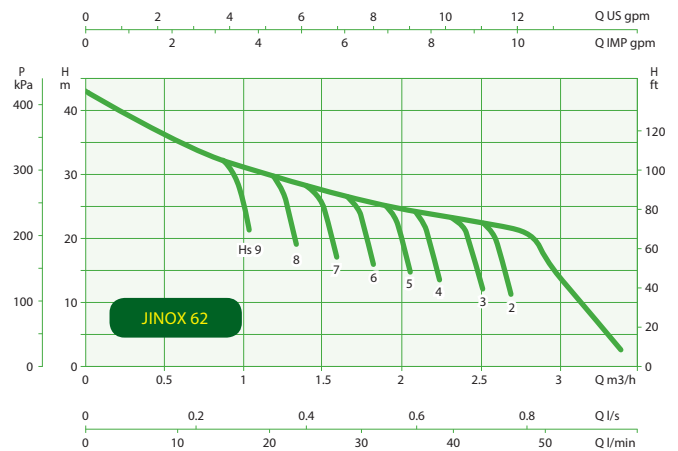