

Garden Series



SJ35-04



SJ35-04PC



SJ60-08PC

Tested in compliance with
AS/NZS 4020
for use in contact with safe drinking water



Model Numbers:

SJ35-04
SJ35-04PC
SJ60-08PC

VALUE FOR MONEY DOMESTIC GARDEN PUMP RANGE

APPLICATION

Ideal for garden watering, garden hoses, dripper systems and garden sprinklers.

SJ35-04 This is a manual pump, suitable for connection to a standard power outlet.

SJ35-04PC & SJ60-08PC These are automatic models, suitable for connection permanently to a power supply.

FEATURES & BENEFITS

Pump

Single stage jet assisted centrifugal pump:

- Higher operating pressures
- Less moving parts for increased dependability
- Self priming for easier installation

Corrosion resistant and stainless steel pump components:

- Longer life when pumping a variety of water qualities
- Reduced friction within the casing and impellers

High quality purpose built 2 pole, 50Hz, IP55 TEFC pump motors, designed to Davey's high quality specifications:

- Permanent split capacitor starting for dependable and frequent starting everytime
- In-built thermal overload for long motor life and protection against motor damage due to jamming

- High quality sealed bearings for longer life
- Fitted with a power lead and three pin plug for ease of connection to power supply
- Resists ingress of dust and dirt

Hydraulic assembly attached to motor bracket at 8 points with oring seal to the stainless steel pump casing:

- Better sealing
- Longer service life

Designed with the serviceman and installer in mind:

- Suction and discharge are close for easier installation
- Quality components throughout for long life and easier maintenance

Every pump is performance and pressure tested in the factory to ensure quality and reliability.



Making water work for you
www.dowdens.com.au

MACKAY (Head Office)
9-15 Industrial St, Mackay Qld 4740
Phone: 07 4969 4949
info@dowdens.com.au

ROCKHAMPTON
4/415 Yaamba Rd, Rockhampton Qld 4701
Phone: 07 4923 6969
info@dowdens.com.au

PROSERPINE
2 Mann St, Proserpine Qld 4800
Phone 07 4969 4940
info@dowdens.com.au

Garden Series

Mondial Press

In-built check valve for easier installation.
In-built spring and diaphragm shock absorber:

- No need for pressure tanks on many installations

No adjustments for operation:

- Constant non-cycling pump operation

Solid state electronic control circuit with "tropicalisation" treatment:

- Longer life


Loss of prime protection:

- Saves pump from damage when water supplies run out

OPERATING LIMITS	
Flow capacities to	80 lpm
Pressure heads up to	42m
Maximum operating pressure	600 kPa
Maximum incoming (suction) pressure	140 kPa
Maximum ambient temperature	50°C
Maximum water temperature	45°C
Minimum water temperature	1°C
Single phase (supplied with 3 pin plug)	1 x 230V ± 10%
Frequency	50Hz
Protection (motor)	IP55
Suitable fluids	Clean potable water of neutral pH containing no solids or abrasives.

ELECTRICAL DATA		
Model	SJ35-04	SJ60-08
Nominal rpm	2900	
Volts / hertz / phase	220-240 / 50 / 1	
IP rating / insulation	55 / Class F	
Amps	2.35	4.8
kW (P ₁) / (P ₂)	0.53 / 0.37	1.16 / 0.9
Capacitor	13µF	20µF
Power lead	1.8m with Aust/NZ 3 pin plug	

HYDRAULIC PERFORMANCE

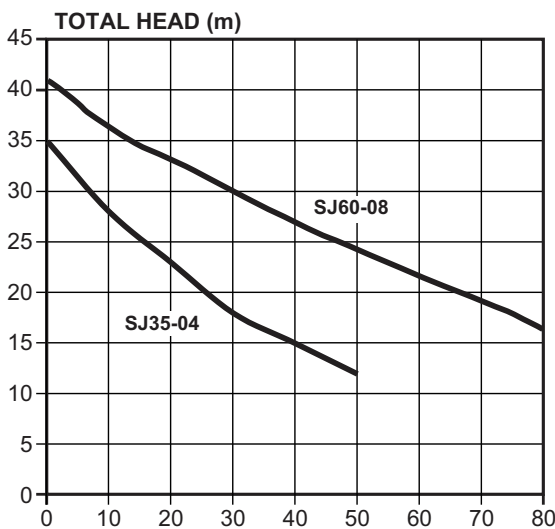

MATERIALS OF CONSTRUCTION	
PART	MATERIAL
PUMP	
Impellers	304 stainless steel
Pump casing	304 stainless steel
Pump shaft	304 stainless steel
Seal ring (stationary): SJ35-04	Ceramic
Seal ring (stationary): SJ60-08	Silicon Carbide
Seal ring (rotating)	Carbon
Seal ring elastomer	EPDM
Seal spring: SJ35-04	304 stainless steel
Seal spring: SJ60-08	316 stainless steel
Orings	EPDM
Jet / venturi / coverplate	Glass filled thermoplastic
Motor shell	Aluminium
Shell finish	Polyester
PRESS CONTROL	
Housing	Glass fibre reinforced polyamide PA 6 GF 30%
Diaphragm	EPDM
Spring	Steel C 72 UNI 3545
Flow valve	Brass OT 58 UNI 5705 / 65
Check valve	Glass fibre reinforced polyamide PA 6 GF 30%
Control box	Self extinguishing thermoplastic resin VO
Printed circuit	Vetronite

GARDEN WATERING FLOW RATE GUIDE

The SJ35-04 pump models can supply a variety of garden watering applications, such as :-

- A garden hose with a spray nozzle fitted, or;
- A garden spray system with up to 25 microjet sprays, or;
- A garden dripper system with up to 200 garden drippers (4 litre per hour drippers), or;
- Two small impact sprinklers

The larger SJ60-08 model is capable of up to double the above, though still suitable for running a single garden hose.

With the correct selection of pipework, valves and automatic irrigation controller, the range of models can even be used to power a fully automated watering system.

Your garden watering professional can give you the best advice on how to utilise the valuable rainwater you have captured for the most efficient usage in your garden.

DIMENSIONS

Model	A	B	C	F	H	H1	M	N	N1	S	W	Inlet B.S.P.	Outlet B.S.P.	Net Weight (kg)
SJ35-04	90	82	170	355	174	128	30	100	130	7	107	1" F	1" F	5.6
SJ35-04PC	90	82	170	355	308	128	30	100	130	7	107	1" F	1" F	7.0
SJ60-08PC	100.5	82	213	415	457	158	39	120	158	7	142	1 1/4" F	1" F	11.9

